



WASTE BALING PRESSES

Baler, hydraulic press PAAL Pacomat 5

Technical specification

Max. pressure:	50 tons	Year of production:	2002
Unit pressure:	7.14 kg/cm ²	Number of strappings:	3 in horizontal
Cross-section of the channel:	1000 x 700 mm	Filling inlet:	1250 x 950 mm
Bale weight:	do 500 kg	Weight:	ca. 10 tons
Supply:	400 V/ 30 kW	Bale tying:	automatic, wire

Efficiency on idle: max 135 m³/ hour

Theoretical efficiency with material in density 30 kg/m³ 4 tons/hour


Theoretical efficiency with material in density 60 kg/m³ 8 tons/hour

Theoretical efficiency with material in density 100 kg/m³ 13,5 tons/hour

- Open charging hole allows the filling with the conveyor belt .
- Knives on the press plate and frame of the baler to cut off the excess material
- Automatic regulation of the light of the channel
- Automatic bale tying with the wire
- Choosing the length of the finished bale from the operator panel
- Pressing plate which is stable carried on the big rolls
- Big flops of the press chamber for easier maintenance

Dimension:

PACOMAT

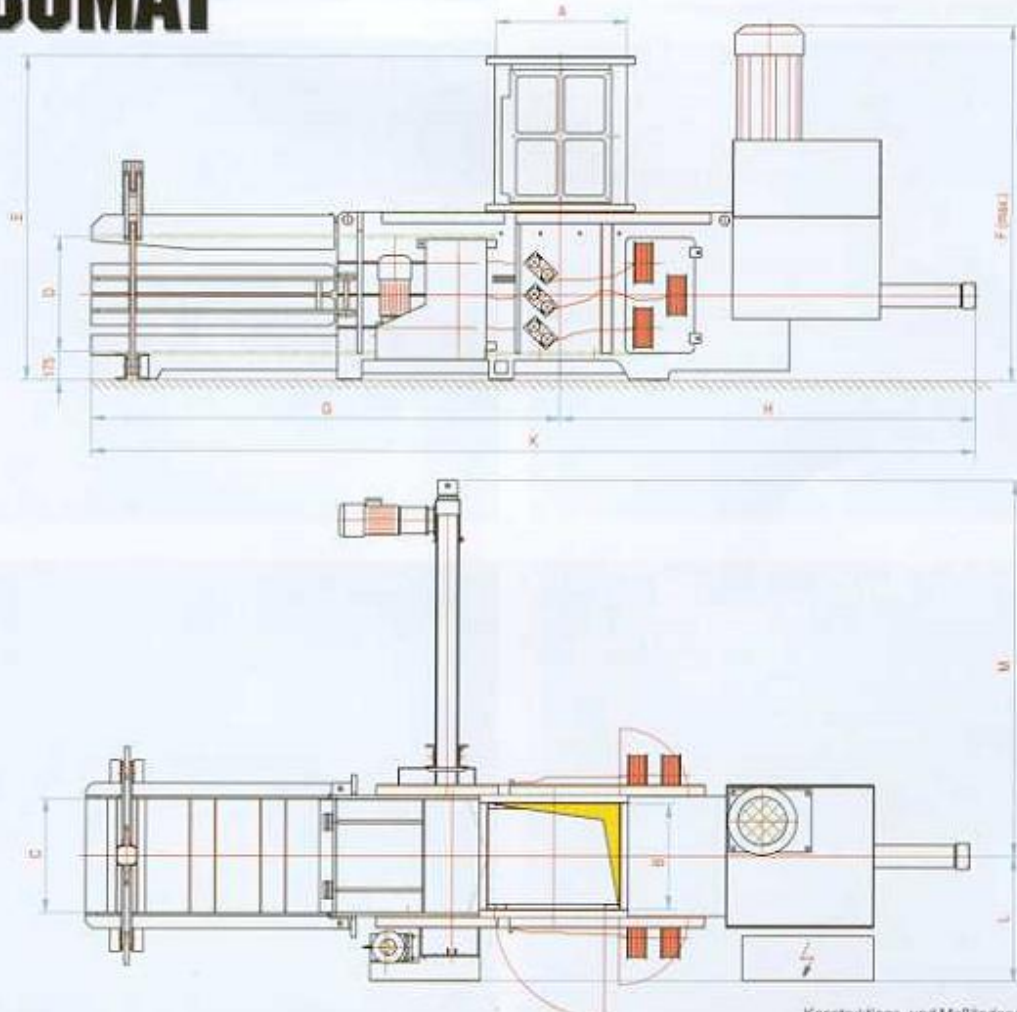

Konstruktions- und Maßänderungen vorbehalten

Abmessungen:	mm	A	B	C	D	E	F	G	H	K	L	M	N
PACOMAT	V	1250	950	1000	700	2060	2350	4340	3710	8050	1010	2800	2070



Zdjęcia poglądowe

Nasze instalacje

-
-
-
-

Masz pytania zadzwoń **+48 33 816 01 69**
 Więcej maszyn na www.belowniceuzywane.pl

ARTechnic
ul. Gen. St. Maczka 9
43-300 Bielsko-Biała, POLAND

INFOLINIA: 801 000 816
tel.: +48 33 816 01 69
fax: +48 33 443 20 46

www.artehnic.pl
www.belowniceuzywane.pl
biuro@artehnic.pl